

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 818 016 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**26.05.1999 Bulletin 1999/21**

(21) Application number: **96901669.0**

(22) Date of filing: **07.02.1996**

(51) Int Cl.<sup>6</sup>: **G06F 19/00**

(86) International application number:  
**PCT/CA96/00082**

(87) International publication number:  
**WO 96/24905 (15.08.1996 Gazette 1996/37)**

**(54) APPARATUS AND METHOD FOR MONITORING ACTIVITY OF THE HUMAN HEART**

**GERÄT UND VERFAHREN ZUR ÜBERWACHUNG DER AKTIVITÄT DES MENSCHLICHEN  
HERZENS**

**APPAREIL ET PROCEDE POUR SURVEILLER L'ACTIVITE D'UN COEUR HUMAIN**

(84) Designated Contracting States:  
**DE FR GB IT**

(30) Priority: **09.02.1995 US 385817**

(43) Date of publication of application:  
**14.01.1998 Bulletin 1998/03**

(73) Proprietor: **Dower, Gordon Ewbank**  
**Point Roberts, Washington 98281 (US)**

(72) Inventor: **Dower, Gordon Ewbank**  
**Point Roberts, Washington 98281 (US)**

(74) Representative: **Jehan, Robert et al**  
**Williams, Powell & Associates,**  
**4 St Paul's Churchyard**  
**London EC4M 8AY (GB)**

(56) References cited:

**GB-A- 2 272 770                      US-A- 5 058 598**  
**US-A- 5 217 020**

- **PROCEEDINGS OF COMPUTERS IN  
CARDIOLOGY, IEEE PRESS NEW YORK US, 25  
- 28 September 1988, WASHINGTON D.C., US,  
pages 449-451, XP002004856 J.A.SCHERER ET  
AL: "Synthesis of the 12 Lead Electrocardiogram  
from a 3 Lead Semi-Orthogonal Subset using  
Patient-specific Linear Transformation Arrays"**
- **INSTRUMENTATION AND MEASUREMENT  
TECHNOLOGY CONFERENCE, WASHINGTON,  
APRIL 25 - 27, 1989, no. 1989, 25 April 1989,  
INSTITUTE OF ELECTRICAL AND  
ELECTRONICS ENGINEERS, pages 184-189,  
XP000041359 PERKUSICH A ET AL: "AN  
EXPERT ECG ACQUISITION AND ANALYSIS  
SYSTEM"**
- **MEDICAL AND BIOLOGICAL ENGINEERING  
AND COMPUTING, vol 25, no. 2, March 1987,  
STEVENAGE GB, pages 155-164, XP002004857  
C.L.LEVKOV: "Orthogonal Electrocardiogram  
derived from the limb and chest electrodes of the  
conventional 12-Lead system"**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 818 016 B1**

## Description

## FIELD OF THE INVENTION

5 [0001] This invention relates to electrophysiology and, in particular, to signal processing apparatus used in electrocardiography.

## BACKGROUND TO THE INVENTION

10 [0002] In order to better understand the background and concept of the present invention it is desirable to describe the terminology of electrocardiography and vectorcardiography.

*Electrocardiography*

15 [0003] The term electrocardiogram ("ECG") was coined by Einthoven (see W. Einthoven, G.E. Fahr, A. DeWart, *On the Direction and Manifest Size of the Variations of Potential in the Human Heart and on the Influence of the Position of the Heart on the Form of the Electrocardiogram* (translation), Am. Heart J. 40:163, 1950). It refers to a plot against time of the varying potential differences produced by the heart between body surface electrodes, at specified locations. The conventional 12-lead ECG is a set of 12 such plots identified as leads I, II, III, aVR, aVL, aVF, V1, V2, V3, V4, V5  
20 and V6, recorded from electrodes on the right arm (RA), left arm (LA), left leg (LL), and on the chest: see Fig. 1. A 10th electrode is usually placed on the right leg (RL) to serve as a ground, to reduce 60-cycle noise. However, placement of a ground electrode on the right leg is merely a matter of convenience. Other ground electrode positions may be used and, while the designation RL implies a ground electrode, it does not mean that the electrode is necessarily placed on the right leg. Herein, and following common practice, RA is abbreviated to R, LA is abbreviated to L, LL is abbreviated to F (for foot), and RL is abbreviated to G (for ground).  
25

[0004] Note that the term "lead" has a dual meaning and must be taken in its proper context. Sometimes it refers to a wire connected to a patient. Sometimes it refers to a tracing. The following account requires close attention to various references of potential used in electrocardiography, yet this is difficult because an inconsistent terminology has evolved. Time varying potential differences will be indicated by the lower case symbol "v" with subscripts to indicate polarity -  
30 the first indicating the positive pole of the measuring device, the second indicating the negative pole or reference potential.

[0005] Einthoven's original leads were I, II and III tracings of the voltages between LA and RA, LL and RA, and LL and LA, respectively, with the convention that upward deflections resulted when the leading member of each of the foregoing electrode pairs became positive with respect to the other. Herein, the time varying voltage or signal giving rise to the lead I tracing is denoted as  $v_{LR}$ , that for lead II as  $v_{FR}$ , and that for lead III as  $v_{FL}$ . (Modern electrocardiographs employ differential amplifiers to reject common-mode electrical noise, so  $v_{LR}$  is given as  $v_{LG} - v_{RG}$ , etc.)  
35

[0006] The chest leads V1-V6 were introduced by Wilson (see F.N. Wilson, F.D. Johnston, A.G. MacLeod, P.S. Barker, *Electrocardiograms that Represent the Potential Variations of a Single Electrode*, Am. Heart J. 9:447, 1934), who referred to the chest electrode as the exploring electrode. An upward deflection occurred when the exploring electrode became positive with respect to what he thought of as a neutral reference: the "central terminal" formed from the tie point of three equal resistors from the RA, LA and LL electrodes. Herein, Wilson's central terminal WCT is denoted by W. Thus, the signals recorded as V1 to V6 will be  $v_{1W}$  to  $v_{6W}$ .  
40

[0007] Since they use WCT as a reference, leads V1-V6 are called unipolar leads, whereas leads I, II and III are called bipolar leads. The early electrocardiographs were single-channel devices, hence the chest leads of the ECG were recorded in sequence, the exploring electrode being moved to record the various chest leads sequentially. Subsequently, the exploring electrode was also placed on the limbs to record the unipolar limb leads VR, VL and VF. The signals recorded as these leads were  $v_{RW}$ ,  $v_{LW}$ , and  $v_{FW}$ , respectively. Goldberger observed that the central terminal resistor connected to the explored limb partly shunted the signals, so he removed it thereby augmenting the signals (see E. Goldberger, *A Simple, Indifferent Electrocardiographic Electrode of Zero Potential and Technique of Obtaining Augmented, Unipolar, Extremity Leads*, Am. Heart J. 23:483, 1942). The "augmented" unipolar limb leads aVR, aVL and aVF complete the set of 12 leads, or tracings, in the 12-lead ECG.  
50

[0008] In electrocardiography texts, Einthoven's triangle is commonly used to show the relationships between limb-lead electrodes and tracings. To enable a better understanding of the terminology used herein, Einthoven's triangle is shown on the left in Fig. 2 together with its comparable representation on the right which adopts the terminology. Fig. 2 shows that Einthoven's law, viz.  
55

$$\text{lead II} = \text{lead I} + \text{lead III}$$

is equivalent to Kirchhoff's voltage law, viz.

$$V_{LR} + V_{FL} + V_{RF} = 0.$$

One may go on to show that only two channels of information are required to produce all six limb leads of the 12-lead ECG. This is made use of in today's electrocardiographs which record only eight channels of information, two for the limb leads and six for the chest leads. A modern electrocardiograph typically has 10 lead wires in the cable going to the patient, records the ECG in 8 channels of information, and produces 12 ECG tracings.

#### Vectorcardiography

[0009] The cyclic pattern of body surface potentials that results from the heart's cycle of electrical activation and recovery is a manifestation of an electric field in the body. Such field can be approximated by a mathematical model that represents the heart as a current dipole of varying direction and magnitude. This is a three-dimensional vector quantity and is called the heart vector.

[0010] The heart vector changes from instant to instant. According to the lead vector concept of Burger and van Milaan, for every electrode position on the body surface there is a lead vector (see H.E. Burger, J.B. van Milaan, *Heart Vector and Leads*, Brit. Heart J. 10:229, 1948). The scalar product of the lead vector and the heart vector gives the instantaneous potential in the unipolar ECG lead for that electrode position. The difference between the two unipolar lead vectors of two body surface electrodes gives the bipolar lead vector whose scalar product with the heart vector yields the instantaneous potential of the bipolar ECG lead between the two electrodes.

[0011] The heads of the unipolar lead vectors for all points on the body surface define an image surface. Frank (see E. Frank, *The Image Surface of a Homogenous Torso*, Am. Heart J. 47:757, 1954) experimentally mapped the image surface of one individual and used the lead vector concept to design a system of eight electrodes, with appropriate lead wires and resistors (see E. Frank, *An Accurate, Clinically Practical System for Spatial Vectorcardiography*, Circ. Res. 3:243, 1955), known as the Frank lead system. Except for RL and LL, the electrode positions of the Frank lead system differ from the 10 used in the conventional ECG. The outputs of the Frank lead system are three voltage signals known as x, y and z, because they correspond to the rectangular coordinates of the heart vector, times a scaling factor. These signals can be graphed as x, y and z orthogonal ECG tracings, but a more common practice is to make xy, xz and yz plots or "loops" known as vectorcardiograms (VCGs) in the frontal, transverse and sagittal planes of the subject.

[0012] VCGs have not gained popularity, but they have provided valuable insight into the inter-relationships between the various ECG tracings, which are essentially projections of the VCG loops onto lines representing the approximate directions of the lead vectors. Such projections can be made in software or hardware. This was done when Dower et al. described the derivation (i.e. synthesis) of the 12-lead ECG from the xyz signals of the Frank lead system (see G. E. Dower, H.B. Machado, J.A. Osborne, *On Deriving the Electrocardiogram from Vectorcardiographic Leads*, Clin. Cardiol. 3:87, 1980). The resulting derived or synthesized ECG ("ECGD") matches the ECG closely enough for most clinical purposes. But the match is not exact partly because the representation of the heart by a current dipole is only about 90 per cent correct. The reason for synthesizing the ECG as the ECGD, rather than recording it directly from the conventional electrode positions, was to save the technician the effort of applying two lead systems when both ECGs and VCGs were required. Edenbrandt and Pahlm avoided dual systems by synthesizing the Frank xyz signals from the conventional ECG lead signals by using a matrix that was the inverse of that which Dower used to synthesize the 12-lead ECGD from the xyz signals of Frank (see L. Edenbrandt, O. Pahlm, *Vectorcardiogram Synthesized From a 12 lead ECG: Superiority of the Inverse Dower Matrix*, J. Electrocardiol. 21:361, 1988). They termed the new matrix the inverse Dower Matrix.

[0013] United States Patent No. 4,850,370 entitled *Method and Apparatus for Sensing and Analyzing Electrical Activity of the Human Heart*, granted to G. E-Dower on July 25, 1989, describes a method and apparatus for producing xyz vectorcardiographic signals, electrocardiographic signals corresponding to the lead signals of a 12-lead electrocardiogram, or both, utilizing four electrode positions on the chest of a patient. With a reduced number of electrodes, the method and apparatus described could be used in circumstances where a conventional system of 10 electrodes would be difficult or impractical.

#### Extra Chest Leads

[0014] Although the number of electrode positions on the chest for recording the 12-lead ECG is typically six, other positions such as V7, V8, V9, V3R, V4R and V5R have been used occasionally: see Fig. 3. These positions can be helpful in the diagnosis of certain conditions, e.g. infarctions on the posterior or right aspects of the heart. However, increasing the number of electrodes from 10 to 16 can be a burdensome routine.

[0015] In a paper entitled *"Synthesis of the 12 Lead Electrocardiogram from a 3 Lead Semi-Orthogonal Subset Using Patient-Specific Linear Transformation Arrays"*, J.A. Scherer and J. M. Nicklas, Proceedings of Computers in Cardiology, IEEE Press, New York, U.S.A., 1989, at pages 449 to 451, a method is described wherein input signals received from a plurality of conventional electrode positions generate a transformation which, when applied to signals from a subset of such conventional positions, may be used to synthesize signals for the remaining positions outside the subset. This approach is taken a step further in United States Patent No. 5,058,598 *"Method And Apparatus For Synthesizing Leads Of An Electrocardiogram"* granted to Nicklas and Scherer on October 22, 1991. In the patent, Nicklas and Scherer indicate that signals for unconventional positions may be likewise synthesized. However, whether a signal is to be synthesized for a conventional position or an unconventional position by the method and apparatus disclosed in the patent, it appears that signal information for the desired position is necessary in order to produce the required transformation. Thus, the use of an electrode at the desired position, and the measurement of signals from that electrode is a prerequisite. In general, and in the case of chest positions V7, V8, V9, V3R, V4R and V5R in particular, the necessity for such signal information from such an electrode is undesirable because the information may not exist or be available at the required time.

[0016] Accordingly, a primary object of the present invention is to provide apparatus for producing one or more extra chest leads without the use of extra electrodes.

[0017] A further object of the present invention is to provide new and improved apparatus which, utilizing the system of a conventional 12-lead ECG and its conventional electrode positions, enables health care professionals to substantially see the ECG patterns that would arise from one or more other electrode positions around the chest of a subject's body.

[0018] A further object of the present invention is that the apparatus be easily usable in conjunction with existing or conventional electrocardiographs.

#### SUMMARY OF THE INVENTION

[0019] In a broad aspect of the present invention as defined in claim 1, there is provided signal processing apparatus for use with an electrocardiograph monitoring activity, of the human heart, the apparatus including input means for receiving input signals from chest electrodes positioned at conventional positions V1, V2, V3, V4, V5 and V6 and limb electrodes positioned at conventional positions RA, LA and LL. Signal processing means is operatively connected to such input means for synthesizing one and preferably two or more signals substantially corresponding to the unsynthesized signal or signals that would be produced by a further chest electrode or electrodes, if such a further electrode or electrodes were used on the body at a chest position or positions other than the conventional positions. The apparatus further includes signal output means for providing the synthesized signal as an output to the electrocardiograph.

[0020] The synthesized signal or signals may be a signal or signals corresponding to a signal or signals from the group consisting of chest lead signals V3R, V4R, V5R, V7, V8 and V9.

[0021] In a preferred embodiment of the present invention, the apparatus includes means for providing unsynthesized signals as an output from the signal output means to the electrocardiograph. Further, the preferred embodiment includes signal selection means for selectively directing to the output means unsynthesized signals corresponding to the input signals from the conventionally positioned limb and chest electrodes or the synthesized signal. The input means may also include means for receiving an input signal from a conventional ground electrode at position RL (which, as noted above, is a position of convenience and not necessarily the right leg).

[0022] The signal selection means may comprise a switch switchable between a first position at which the unsynthesized signals are directed to the output means and a second position at which the synthesized signal is directed to the output means.

[0023] The output of apparatus in accordance with the present invention may be simply connected to the input of a conventional electrocardiograph. When unsynthesized signals are selected at the output, the electrocardiograph is responsive to produce tracings of leads I, II, III, aVR, aVL, aVF, V1, V2, V3, V4, V5 and V6 or a 12-lead ECG. When synthesized signals are selected at the output, the electrocardiograph is responsive to substantially produce tracings of leads that could be produced directly with additional chest electrodes.

[0024] With the foregoing selection feature, the 12 leads of a conventional ECG are preserved in an original unsynthesized form. They are uncompromised by the approximation implicit in the heart vector concept. Yet, with the present invention, synthesized ECG leads corresponding to those which would arise from other electrode sites around the chest can be observed without adding significantly to the cost of the procedure for a conventional 12-lead ECG. In relation to the interpretation of results, both as to the conventional 12 leads and as to additional synthesized leads, the selection feature is particularly advantageous because it enables comparison with current and previously recorded conventional ECGs with the knowledge that any observed discrepancies will not have arisen from the synthesis procedure.

[0025] In accordance with another aspect of the present invention as defined in claim 8, there is provided a method

of monitoring heart activity of a human body comprising the steps of attaching chest electrodes at chest positions V1, V2, V3, V4, V5 and V6 of the body, attaching limb electrodes at positions RA, LA and LL of the body; sensing voltage signals produced by the electrodes in response to the heart activity; and, synthesizing from the sensed signals a voltage signal substantially corresponding to the voltage signal that would be produced by a further chest electrode, if such a further chest electrode was used on the body at a chest position other than chest positions V1 to V6. In a preferred embodiment the synthesized signal is a signal substantially corresponding to a signal that would be produced by a further chest electrode located on the body at a position selected from the group consisting of chest positions V3R, V4R, V5R, V7, V8 and V9.

[0026] The foregoing and other features and advantages of the present invention will now be described with reference to the drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0027] Fig. 1 illustrates a human body with conventional ECG electrode positions.

[0028] Fig. 2 graphically illustrates terminology used herein with a drawing of Einthoven's triangle

[0029] Fig. 3, which is on the same sheet of drawings as Fig. 1, is a transverse section of the chest illustrating chest leads V3R, V4R, V5R, V6R, V7, V8 and V9 in addition to chest leads V1 to V6 shown in Fig. 1.

[0030] Fig. 4 is a circuit diagram of signal processing circuitry forming part of an apparatus in accordance with the present invention.

[0031] Fig. 5, which is on the same sheet of drawings as Fig. 2, is a circuit diagram of a resistor network which interconnects with the circuitry shown in Fig. 4.

## DETAILED DESCRIPTION

[0032] The apparatus shown in Figs. 4 and 5 illustrates signal processing circuitry which forms part of an apparatus designed to receive input signals from electrodes at conventional positions LA, LL, V1, V2, V3, V4, V5, V6, RA and ground RL of body 100 shown in Fig. 1, and to provide as an output unsynthesized signals corresponding to the signals from such conventionally positioned electrodes, or synthesized signals substantially corresponding to signals that would be produced from electrodes at chest positions V3R, V4R, V5R, V7, V8 and V9 shown in Fig. 3. The output is provided to a conventional electrocardiograph (not shown). When such synthesized signals are provided as an output, they are provided to the exclusion of the unsynthesized signals from the electrodes at positions V1 to V6; not to exclusion of all unsynthesized signals. The unsynthesized signals from electrodes at positions LA, LL, RA and RL will continue to appear.

[0033] Only part of the apparatus is shown in Figs. 4 and 5 because the remaining part is generally repetitive of that which is shown. Thus, while Fig. 4 illustrates an input amplifier unit AMP with a single input 10, the complete apparatus includes eight of such units; one for an input from each of the eight electrodes at positions LA, LL, V1, V2, V3, V4, V5 and V6. Each unit incorporates basic amplifier circuitry comprising a high input gain operational amplifier 1, input resistors  $R_5$  and  $R_{10}$ , and feedback resistor  $R_{40}$ . As well, each unit incorporates at its input a spark gap SG, resistor  $R_{140}$  and zener diodes D to protect against input overvoltages such as may occur if the apparatus is wired to a heart patient during defibrillation.

[0034] In the example of the present embodiment, it may be noted that actual resistance values for the resistors shown in Fig. 4 correspond in kilohms to their labelled subscripts. Thus, in the case of amplifier unit AMP,  $R_5$  indicates a 5 kilohm resistor,  $R_{10}$  indicates a 10 kilohm resistor, and  $R_{40}$  indicates a 40 kilohm resistor. The same is true for all other resistors shown in Fig. 4.

[0035] Fig. 4 also shows an input 15 for an input from the electrode at position RA in Fig. 1. and an input 20 for a ground input from the electrode at position RL in Fig. 1. The circuitry through which signals received at input 15 are processed includes a high input gain operational amplifier 2, input resistors  $R_5$  and  $R_{40}$ , and feedback resistor  $R_{10}$ . As in the case of each input amplifier unit AMP, the circuitry after input 15 incorporates a spark gap SG, resistor  $R_{140}$  and zener diodes D.

[0036] The signal between RA and RL in Fig. 4, i.e.  $V_{RG}$  in Fig. 2, is amplified 5/4 times by amplifier 2 and fed through  $R_{10}$  at the inverting input of amplifier 1 which amplifies the signal by minus 4 times to give  $-5V_{RG}$ . The signals between each of the eight inputs to the eight AMPs and RL become  $5V_{LG}$ ,  $5V_{FG}$ ,  $5V_{1G}$ ,  $5V_{2G}$ ,  $5V_{3G}$ ,  $5V_{4G}$ ,  $5V_{5G}$  and  $5V_{6G}$ . With  $-5V_{RG}$  added to each, they become, respectively,  $5V_{LR}$ ,  $5V_{FR}$ ,  $5V_{1R}$ ,  $5V_{2R}$ ,  $5V_{3R}$ ,  $5V_{4R}$ ,  $5V_{5R}$  and  $5V_{6R}$ . Thus, the outputs from the eight AMPs, each leading to a corresponding line L1, give the signals between the LA, LL, V1, V2, V3, V4, V5 and V6 electrodes and the RA electrode, each increased 5-fold and referenced to RL. Common mode signals, i.e. signals common to both the LA to V6 electrodes and to RA, all appearing with respect to RL, cancel.

[0037] The signals on lines L1 are then reduced to their original size by voltage dividers formed by  $RD_{20}$  and  $RD_5$  (only one of which is shown in Fig. 4). The  $v_{LR}$  and  $v_{FR}$  signals are fed directly to associated outputs 50 (one for LA,

one for LL - only one of which is shown in Fig. 4). The other signals,  $v_{1R}$  to  $v_{6R}$ , are fed to switch SW which is a 6-pole, 2-position switch leading to six outputs 75. Only one of outputs 75 is shown in Fig. 4, and may be considered as the output for any one of V1, V2, V3, V4, V5 or V6 when switch SW is in the upward throw position indicated in Fig. 4.

[0038] It will be understood that the signals from the electrodes at positions V1 to V6 which appear at outputs 75 when switch SW is in the upward throw position shown in Fig. 4 are unsynthesized signals. When switch SW is in this position, the signals from outputs 50, which are also unsynthesized signals, and the signals from outputs 75 may be fed directly to a conventional electrocardiograph to produce a conventional 12-lead ECG.

[0039] The RA output in the apparatus of Fig. 4 arises directly from the apparatus ground which is seen as RL at the input to the apparatus. To understand this arrangement, imagine that the RL electrode is placed on the right arm. (The location of the right leg electrode does not affect the 12-lead ECG). Now, consider the signal from a patient between LA and RA. This double-ended signal referred or measured with reference to RL has been converted to a single-ended signal referred to RA. Thus, the input signals are  $V_{LG}$  and  $V_{RG}$ , whereas the output signal is  $V_{LR}$ , which an electrocardiograph will plot as the lead I tracing. Similarly, all inputs are referred to RL whereas all outputs are referred to RA. Note, however, that the pattern of potential differences among the inputs, including RA, is reproduced among the outputs, including RA. Consequently, an electrocardiograph attached to the outputs will respond as if it were attached to the inputs. Its output will not be affected by placing the RL electrode on the right arm instead of the right leg. Note that the impedance to RL of the outputs are due to  $RD_{20}$  in parallel with  $RD_5$ , i.e. 4 units (in practice, 4 kilohms). To match this impedance, there is resistor R4 at the RA output.

[0040] The circuitry that produces synthesized signals substantially corresponding to signals that would be produced from electrodes at chest positions V3R, V4R, V5R, V7, V8 and V9 comprises seven inverter units INV, only one of which is shown in Fig. 4, and six resistor networks like that shown in Fig. 5. Each inverter unit comprises an operational amplifier 3 wired with input and feedback resistors R40 to produce a unity gain signal inversion.

[0041] As indicated in Fig. 5, each of the six resistor networks is associated with one of the six desired synthesized signals. They receive inputs either from a line L1 or a line L2 shown in Fig. 4. A synthesized signal is produced as an output on a line L3 in Fig. 5 - and this signal is also the input along the same line to a corresponding downward throw position of switch SW in Fig. 4. When switch SW is in the downward throw position, the synthesized signals will appear at outputs 75 and may be fed directly to a conventional electrocardiograph to produce tracings of leads V3R, V4R, V5R, V7, V8 and V9. The signals that will do this are  $V_{(3R)R}$ ,  $V_{(4R)R}$ ,  $V_{(5R)R}$ ,  $V_{7R}$ ,  $V_{8R}$  and  $V_{9R}$ , i.e. they are referred to RA, not WCT.

[0042] It will be readily apparent from Fig. 4 that unsynthesized signals will continue to appear at the LA and LR outputs 50, and the RA and LL outputs, when switch SW is in its downward throw position.

[0043] The synthesized signals substantially correspond to unsynthesized signals that could be obtained directly from further chest electrodes positioned on the chest of body 100 at positions V3R, V4R, V5R, V7, V8 and V9 indicated in Fig. 3. In performing the synthesis, inverter units INV would not be used but for the fact that some of the resistor values in the network of Fig. 5 become negative in some cases. If this were not so, and if all resistors were determined to have positive resistance values, then all inputs to the resistor network of Fig. 5 could be taken from a line L1 in Fig. 4. However, as some resistors were determined to have negative resistance values, the equivalent of a negative resistance was achieved by assuming a positive value and inverting the signal input.

[0044] In more detail, Table 1 below shows calculated resistance values for a resistor network associated with each synthesized lead V3R, V4R, V5R, V7, V8 and V9. Some of the values are positive values; some are negative. A negative value does not mean negative resistance. Rather, it indicates that the input to the resistor should come from line L2 in Fig. 4 instead of line L1.

TABLE I

	$R_{LA}$	$R_{LL}$	$R_{V1}$	$R_{V2}$	$R_{V3}$	$R_{V4}$	$R_{V5}$	$R_{V6}$
V3R	-120	70	88	111	665	-341	-243	-264
V4R	-171	94	138	193	11165	-444	-392	-485
V5R	-190	87	201	443	-558	-486	-888	-6080
V7	348	84	-118	-100	-328	124	73	67
V8	704	87	-149	-114	-259	179	93	83
V9	10818	77	-164	-108	-179	263	107	89

Resistance values are stated in kilohms.

[0045] Note that all resistance values for  $R_{LL}$  are positive. Thus, no inverter INV is required for  $v_{LL}$ .

[0046] The apparatus shown in Figs. 4 and 5 effectively combines the idea of the inverse Dower matrix with the idea

## EP 0 818 016 B1

of obtaining extra chest leads without applying more electrodes. When the apparatus is interposed between a patient and an electrocardiograph, an 18-lead ECG can be obtained routinely, without significant extra work by a technician.

[0047] However, as it will not be obvious, the following description will serve to explain how the resistance values shown in Table 1 were determined.

### *Derivation of Lead Vectors for the Extra Leads*

[0048] The locations of the electrodes for the extra leads V3R, V4R, V5R, V6R, V7, V8 and V9 are shown in transverse section of the chest in Fig. 3. The coordinates of the positions to which these map on Frank's image surface give the lead vectors for these locations. Because Frank did not define the image surface for these positions, the coordinates were obtained by visual interpolation from two-dimensional projections of image surface contours. They were found to be as follows:

$$V3R = -92i + 10j - 39k$$

$$V4R = -84i - 5j - 7k$$

$$V5R = -77i - 6j + 10k$$

$$V6R = -73i - 8j + 22k$$

$$V7 = 70i - 26j + 74k$$

$$V8 = 44i - 25j + 85k$$

$$V9 = 15i - 17j + 92k$$

where  $i$ ,  $j$  and  $k$  are orthogonal unit vectors.

[0049] Frank used  $xyz$  coordinates instead of  $ijk$  coordinates, but this can cause confusion because the heart vector  $H$  is conveniently expressed as:

$$H = xi + yj + zk$$

whose scalar product with a lead vector  $L = ai + bj + ck$  gives the signal in that lead due to the heart as:

$$H \cdot L = ax + by + cz$$

where  $x$ ,  $y$  and  $z$  are functions of time and  $a$ ,  $b$  and  $c$  are functions of position, tissue conductivity, and geometry. Another term for lead vector  $L$  is transfer Impedance.

[0050] The required unipolar lead chest signals are referred to WCT, but Frank did not choose this as the reference for his image surface. From his diagrams, the lead vector for WCT is:

$$L_{WCT} = -15i - 12j + 28k$$

which must be subtracted from the lead vectors given above to obtain the following unipolar lead vectors:

$$L_{3R} = -77i + 22j - 67k$$

# EP 0 818 016 B1

$$L_{(4R)W} = -69i + 7j - 35k$$

5

$$L_{(5R)W} = -62i + 6j - 18k$$

$$L_{(6R)W} = -58i + 4j - 6k$$

10

$$L_{7W} = 85i - 14j + 46k$$

$$L_{8W} = 59i - 13j + 57k$$

15

$$L_{9W} = 30i - 5j + 84k$$

20 Dividing these equations by Frank's scaling factor of 136 and forming the scalar product with the heart vector gives the unipolar lead signals for each of the electrode positions.

$$v_{(3R)W} = -0.566x + 0.162y - 0.493z$$

25

$$v_{(4R)W} = -0.507x + 0.051y - 0.257z$$

$$v_{(5R)W} = -0.456x + 0.044y - 0.132z$$

30

$$v_{(6R)W} = -0.426x + 0.029y - 0.044z$$

35

$$v_{7W} = 0.625x - 0.103y + 0.338z$$

$$v_{8W} = 0.434x - 0.096y + 0.419z$$

40

$$v_{9W} = 0.221x - 0.037y + 0.471z$$

45 **[0051]** Earlier work on the coefficients given in the Dower matrix (see *On Deriving ...* op. cit.) refers to improvement on the coefficients obtained from Frank's image surface data as a result of a study of several hundred cases. The lead vectors of the resulting Dower matrix were plotted on an Aitoff equal area projection. On the projection, the limb-lead vectors lay approximately along the equator, and the chest vectors lay approximately along the zero and 180° meridians.

**[0052]** The lead vectors for the extra leads were then transformed into spherical coordinates and added to the Aitoff projection. It turned out that there was some unevenness in the angular spacing of the new lead vectors, but this was reduced by slightly moving the vectors. The rationale for so doing was that the new lead tracings may be related by the cardiologist to the corresponding vectorcardiograms (*On Deriving ...* op. cit. Fig. 5). This visual exercise would be less satisfactory if the angular spacing between some of the new lead vectors were uneven, because the conceptual application of the present invention is to obtain different views of the heart, electrically speaking, when looking for evidence of myocardial ischemia or infarction. Lacking experimental data at this time, this process was used to obtain extra chest leads of potential clinical value.

55 **[0053]** The spherical coordinates thus obtained from the Aitoff projection did not include magnitudes because the magnitude coordinate (radius) is not represented in the projection. Accordingly, the magnitude coordinates were taken from, or interpolated from, the magnitudes of the lead vectors for the extra leads obtained from Frank's image surface after transformation from rectangular to spherical coordinates. The resulting spherical coordinates were transformed

to rectangular coordinates to give the following:

$$v_{(3R)W} = -0.566x + 0.164y - 0.490z$$

$$v_{(4R)W} = -0.507x + 0.053y - 0.289z$$

$$v_{(5R)W} = -0.463x + 0.041y - 0.107z$$

$$v_{(6R)W} = -0.425x + 0.010y - 0.022z$$

$$v_{7W} = 0.587x - 0.031y + 0.412z$$

$$v_{8W} = 0.376x + 0.411z$$

$$v_{9W} = 0.221x + 0.473z$$

[0054] It will be understood that the embodiment of the invention shown in Figs. 4 and 5 represents an analog implementation. For this implementation, the extra leads are limited to six, viz. V3R, V4R, V5R, V7, V8 and V9, to replace the six chest leads recorded by a conventional electrocardiograph. Consequently, the  $v_{(6R)W}$  signal is not used, although there is no theoretical reason why not.

[0055] The above equations give signals with respect to WCT which is not the output reference in the circuit of Fig. 4. In Fig. 4, the output reference is RA. (When connected to a conventional electrocardiograph, the electrocardiograph will establish the WCT reference.). To change the reference from WCT to RA, i.e. to make  $v_{RW} = 0$ ,  $v_{RW}$  is subtracted from each equation. Working from the triangle diagram in Fig. 2, it can readily be shown that

$$v_{RW} = -(v_{LR} + v_{FR})/3 = -(v_I + v_{II})/3$$

Since, from the published Dower matrix:

$$v_I = 0.632x - 0.235y + 0.059z$$

and

$$v_{II} = 0.235x + 1.066y - 0.132z$$

therefore:

$$v_{RW} = 0.289x - 0.277y + 0.024z$$

and it follows that:

$$v_{(3R)W} = -0.277x + 0.441y - 0.514z$$

$$v_{(4R)W} = -0.218x + 0.330y - 0.313z$$

$$v_{(5R)W} = -0.174x + 0.318y - 0.131z$$

EP 0 818 016 B1

$$v_{7W} = 0.878x + 0.308y + 0.388z$$

$$v_{8W} = 0.665x + 0.277y + 0.387z$$

$$v_{9W} = 0.510x + 0.277y + 0.449z \quad (1)$$

Herein, the matrix of coefficients from the set of equations (1) will be referred to as the analog extra lead matrix because it is convenient for analog implementation.

[0056] The published Dower matrix was intended for software implementation. Consequently, the published inverse Dower matrix was similarly intended. This means that the inverse Dower matrix cannot be used directly on the electrode signals coming from a patient because there is no common reference. Its inputs  $v_I$  and  $v_{II}$  are referred to RA, whereas its inputs  $v_{V1}$  to  $v_{V6}$  are referred to WCT. Following the convention adopted herein, the inputs are  $v_{LR}$ ,  $v_W$ ,  $v_{1W}$ ,  $v_{2W}$ ,  $v_{3W}$ ,  $v_{4W}$ ,  $v_{5W}$  and  $v_{6W}$ . For analog implementation, and although it would be possible with suitable circuitry to generate the  $v_{1W}$  to  $v_{6W}$  signals, it is simpler to calculate and use a new matrix which may be referred to as an analog inverse matrix. For this purpose, the relevant equations of the published Dower matrix are:

$$v_{LR} = 0.632x - 0.235y + 0.059z$$

$$v_{FR} = 0.235x + 1.066y - 0.132z$$

$$v_{1W} = -0.515x + 0.157y - 0.917z$$

$$v_{2W} = 0.044x + 0.164y - 1.387z$$

$$v_{3W} = 0.882x + 0.098y - 1.277z$$

$$v_{4W} = 1.213x + 0.127y - 0.601z$$

$$v_{5W} = 1.125x + 0.127y - 0.086z$$

$$v_{6W} = 0.831x + 0.076y + 0.230z$$

[0057] Following the same procedures as used to obtain the analog extra lead matrix, and subtracting  $v_{RW}$  from all but the first two of the above equations (which already use RA as a reference), gives the following set of equations the coefficients of which give the Dower matrix when all inputs are referred to RA:

$$v_{LR} = 0.632x - 0.235y + 0.059z$$

$$v_{FR} = 0.235x + 1.066y - 0.132z$$

$$v_{1R} = -0.226x + 0.434y - 0.941z$$

$$v_{2R} = 0.333x + 0.441y - 1.411z$$

$$v_{3R} = 1.171x + 0.375y - 1.301z$$

$$v_{4R} = 1.502x + 0.404y - 0.625z$$

$$v_{5R} = 1.414x + 0.404y - 0.110z$$

$$v_{6R} = 1.120x + 0.353y + 0.206z \quad (2)$$

[0058] If the coefficient matrix from the foregoing set of equations (2) is defined as  $\underline{A}$ , and if  $\underline{A}^T \underline{A}$  is defined as  $\underline{M}$  where  $\underline{A}^T$  is the transpose of  $\underline{A}$ , then, following Edenbrandt and Pahlm (op. cit.), the inverse Dower matrix when referred to RA is  $\underline{M}^{-1} \underline{A}^T$  where  $\underline{M}^{-1}$  is the inverse of  $\underline{M}$ . More particularly:

$$\underline{A} = \begin{array}{c} \text{LR} \\ \text{FR} \\ \text{CR1} \\ \text{CR2} \\ \text{CR3} \\ \text{CR4} \\ \text{CR5} \\ \text{CR6} \end{array} \begin{array}{ccc} \text{X} & \text{Y} & \text{Z} \\ \begin{array}{ccc} .632 & -.235 & +.059 \\ .235 & 1.066 & -.132 \\ -.226 & .434 & -.941 \\ .333 & .441 & -1.411 \\ 1.171 & .375 & -1.301 \\ 1.502 & .404 & -.625 \\ 1.414 & .404 & -.110 \\ 1.120 & .353 & .206 \end{array} \end{array}$$

and,

$$\underline{A}^T = \begin{array}{ccc} \text{X} & \text{Y} & \text{Z} \\ \begin{array}{ccccccccc} .632 & .235 & -.226 & .333 & 1.171 & 1.502 & 1.414 & 1.120 \\ -.235 & 1.066 & .434 & .441 & .375 & .404 & .404 & .353 \\ .059 & -.132 & -.941 & -1.411 & -1.301 & -.625 & -.110 & .206 \end{array} \end{array}$$

Note that the labelling for the matrices  $\underline{A}$  and  $\underline{A}^T$  uses "C" as an abbreviation for "chest". Thus, in accordance with the general convention used herein, the combination "CR" means chest to right arm.

[0059] The product  $\underline{A}^T \underline{A}$  then may be calculated as:

$$\underline{M} = \begin{array}{ccc} 7.498 & 2.163 & -2.638 \\ 2.163 & 2.166 & -1.897 \\ -2.638 & -1.897 & 5.035 \end{array} \quad \text{and,} \quad \underline{M}^{-1} = \begin{array}{ccc} .193 & -.156 & .043 \\ -.156 & .815 & .225 \\ .043 & .225 & .306 \end{array}$$

[0060] Then, the inverse Dower matrix referred to RA is:

$$\underline{M}^{-1} \underline{A}^T = \begin{array}{ccc} \text{LR} & \text{FR} & \text{CR1} & \text{CR2} & \text{CR3} & \text{CR4} & \text{CR5} & \text{CR6} \\ \begin{array}{ccccccccc} \text{X} & .161 & -.126 & -.151 & -.064 & .113 & .201 & .206 & .170 \\ \text{Y} & -.277 & .802 & .177 & -.011 & -.170 & -.046 & .084 & .160 \\ \text{Z} & -.008 & .210 & -.200 & -.318 & -.264 & -.036 & .118 & .190 \end{array} \end{array}$$

[0061] Continuing, the product of  $\underline{M}^{-1} \underline{A}^T$  with the analog extra lead matrix:

	X	Y	Z
CR3R	-.277	.441	-.514

(continued)

	X	Y	Z
CR4R	-.218	.330	-.313
CR5R	-.174	.318	-.131
CR7	.876	.308	.388
CR8	.665	.277	.387
CR9	.510	.277	.449

(see set of equations (1) above) then gives the following matrix  $\underline{V}$  of coefficients for output voltages to be fed to the electrocardiograph:

	LR	FR	v(CR1)	v(CR2)	v(CR3)	v(CR4)	v(CR5)	v(CR6)
CR3R	-.163	.281	.223	.176	.029	-.057	-.081	-.074
CR4R	-.124	.226	.154	.110	.002	-.048	-.054	-.044
$\underline{V} =$ CR5R	-.115	.249	.109	.049	-.039	-.045	-.025	-.004
CR7	.053	.218	-.155	-.183	-.056	.148	.252	.272
CR8	.027	.220	-.129	-.169	-.074	.107	.206	.231
CR9	.002	.252	-.118	-.178	-.108	.074	.181	.216

[0062] Referring now to Fig. 5, basic circuit theory may be used to calculate the resistor values shown in Table 1. For each desired output voltage equation represented by matrix  $\underline{V}$  where the coefficients have been determined so as to give the desired output, there is a corresponding output voltage equation where the output to line L3 may be expressed generally as a function of the eight input voltages from line L1 or L2, the value of  $R_5$  (5 kilohms), and the unknown values of  $R_{LA}$ ,  $R_{LL}$ ,  $R_{V1}$ ,  $R_{V2}$ ,  $R_{V3}$ ,  $R_{V4}$ ,  $R_{V5}$  and  $R_{V6}$ .

[0063] The embodiment of the invention which has been described is an analog implementation. However, as will be understood by those skilled in the art, other analog implementations departing from the specific circuitry which has been described are possible. Further, and again as will be understood by those skilled in the art, the signal processing implemented with analog circuitry may also be implemented with software. In addition, it will be apparent to those skilled in the art that the present invention may be readily implemented in a data communication system where a patient is monitored at one site and signal processing takes place at a remote site.

[0064] In accordance with the method of the present invention, chest electrodes are attached at chest positions V1, V2, V3, V4, V5 and V6 of body 100 and limb electrodes are attached at positions RA, LA and LL of body 100. Voltage signals produced by the electrodes in response to heart activity of body 100 are sensed and, from the sensed signals, a voltage signal substantially corresponding to the voltage that would be produced by a further chest electrode is synthesized. Using apparatus as described with reference to Figs. 4 and 5, including the attachment of a ground electrode at position RL body 100, voltage signals are sensed with reference to RL, and six voltage signals are synthesized - each synthesized signal corresponding to the signal that would be produced by a further chest electrode at one of chest positions V3R, V4R, V5R, V7, V8 and V9 of body 100 as shown in Fig. 3. The necessity to actually attach electrodes at positions V3R, V4R, V5R, V7, V8 and V9 in order to sense the corresponding voltage signals is avoided.

## Claims

1. Signal processing apparatus for use with an electrocardiograph monitoring activity of the human heart, said apparatus including input means (10, 15) for receiving input signals from electrodes attached to the body of a subject (100) whose heart activity is being monitored, said electrodes comprising chest electrodes positioned at conventional positions V1, V2, V3, V4, V5 and V6 (Figs. 1,3) of said body and limb electrodes positioned at conventional positions RA, LA and LL (Fig. 1) of said body, said apparatus being characterized by:

(a) signal processing means (Figs. 4, 5) operatively connected to said input means (10, 15) for synthesizing one or more signals from said input signals when said electrodes are so positioned, said synthesized signal or signals substantially corresponding to an unsynthesized signal or signals that would be produced by a

further chest electrode or electrodes, if such a further chest electrode or electrodes were used on said body (100) at a chest position or positions other than said conventional positions: and,

(b) signal output means (75) for providing said synthesized signal as an output to said electrocardiograph.

2. Apparatus as defined in Claim 1, wherein said synthesized signal is a signal substantially corresponding to a signal from the group consisting of chest lead signals V3R, V4R, V5R, V7, V8 and V9 (Fig.3).
3. Apparatus as defined in Claim 1, wherein said apparatus includes means (Fig. 4) for providing as an output to said electrocardiograph from said output means (75) unsynthesized signals corresponding to said input signals from said conventionally positioned limb and chest electrodes said apparatus further including signal selection means (SW) for selectively directing to said output means (75):

(a) said signals corresponding to said input signals: or,

(b) said synthesized signal.

4. Apparatus as defined in Claim 3, wherein said synthesized signal is a signal substantially corresponding to a signal from the group consisting of chest lead signals V3R, V4R, V5R, V7, V8 and V9 (Fig. 3).

5. Apparatus as defined in Claim 3, wherein said signal selection means comprises a switch (SW) switchable between:

(a) a first position at which said unsynthesized signals corresponding to said input signals are directed to said output means; and

(b) a second position at which said synthesized signal is directed to said output means.

6. Apparatus as defined in Claim 5, wherein said synthesized signal is a signal substantially corresponding to a signal from the group consisting of chest lead signals V3R, V4R, V5R, V7, V8 and V9 (Fig. 3).

7. Apparatus as defined in Claim 3, wherein said input means includes means (20) for receiving an input signal from a ground electrode positioned at conventional position RL (Fig. 1) of said body (100), and wherein:

(a) input signals from said electrodes at positions V1, V2, V3, V4, V5, V6, RA, LA and LL (Figs. 1,3) are referred to RL; and

(b) output signals are referred to RA.

8. A method of monitoring heart activity of a human body (100) wherein chest electrodes are attached at chest positions V1, V2, V3, V4, V5 and V6 (Figs. 1,3) of said body and limb electrodes are attached at positions RA, LA and LL (Fig. 1) of said body, and wherein voltage signals produced by said electrodes in response to said heart activity are sensed, characterized by the step of synthesizing from said sensed signals a voltage signal substantially corresponding to a voltage signal that would be produced by a further chest electrode, if such a further chest electrode was used on said body at a chest position other than said chest positions.

9. A method as defined in Claim 8, wherein said synthesized signal is a signal substantially corresponding to a signal that would be produced by a further chest electrode located on said body (100) at a position selected from the group consisting of chest positions V3R, V4R, V5R, V7, V8 and V9 (Fig. 3).

10. A method as defined in Claim 8, including the step of attaching a ground electrode at position RL (Fig. 1) of said body (100) and sensing said voltage signals from said positions V1, V2, V3, V4, V5, V6, RA, LA and LL (Fig. 1) with respect to said ground electrode.

## Patentansprüche

1. Signalverarbeitungsvorrichtung zum Einsatz mit einem Elektrokardiographen, der die Aktivität des menschlichen Herzens erfaßt, wobei die Vorrichtung eine Eingabeeinrichtung (10, 15) zum Empfang von Eingangssignalen von

mit dem Körper eines Patienten (100), dessen Herzaktivität zu erfassen ist, verbundenen Elektroden einschließt, wobei die Elektroden Brustkorbelektroden, die an üblichen Positionen V1, V2, V3, V4, V5 und V6 (Figuren 1, 3) des Körpers positioniert sind, und Extremitätenelektroden, die an üblichen Positionen RA, LA und LL (Fig. 1) des Körpers positioniert sind, aufweisen, und wobei die Vorrichtung gekennzeichnet ist durch:

5

(a) eine Signalverarbeitungseinrichtung (Figuren 4, 5), die betriebsseitig mit der Eingabeeinrichtung (10, 15) verbunden ist, um eines oder mehrere Signale aus den Eingangssignalen zu synthetisieren, wenn die Elektroden so positioniert sind, wobei das synthetisierte Signal oder die Signale im wesentlichen einem unsynthetisierten Signal oder unsynthetisierten Signalen entsprechen, das/die durch eine weitere Brustkorbelektrode oder weitere Brustkorbelektroden erzeugt würde/würden, wenn eine solche weitere Brustkorbelektrode oder weitere Brustkorbelektroden an dem Körper (100) in einer anderen Brustkorbposition oder anderen Brustkorbpositionen als den herkömmlichen Positionen benutzt würde/würden, und

10

(b) eine Signalausgabeeinrichtung (75) zum Liefern des synthetisierten Signals als Ausgangssignal an den Elektrokardiographen.

15

2. Vorrichtung nach Anspruch 1, wobei das synthetisierte Signal ein Signal ist, welches im wesentlichen einem Signal aus der aus den Brustkorbleitungssignalen V3R, V4R, V5R, V7, V8 und V9 (Fig. 3) gebildeten Gruppe entspricht.

20

3. Vorrichtung nach Anspruch 1, wobei die Vorrichtung Mittel (Fig. 4) zum Bereitstellen unsynthetisierter Signale, die den Eingangssignalen von den wie üblich positionierten Extremitäten- und Brustkorbelektroden entsprechen, als Ausgangssignal an den Elektrokardiographen von der Ausgabeeinrichtung (75) enthält, wobei die Vorrichtung weiter eine Signalauswahleinrichtung (SW) zum selektiven Zuführen von

25

(a) den den Eingangssignalen entsprechenden Signalen oder

(b) dem synthetisierten Signal

an die Ausgabeeinrichtung (75) enthält.

30

4. Vorrichtung nach Anspruch 3, wobei das synthetisierte Signal ein Signal ist, welches im wesentlichen einem Signal aus der aus den Brustkorbleitungssignalen V3R, V4R, V5R, V7, V8 und V9 (Fig. 3) bestehenden Gruppe entspricht.

35

5. Vorrichtung nach Anspruch 3, wobei die Signalauswahleinrichtung einen Schalter (SW) aufweist, der umschaltbar ist zwischen:

(a) einer ersten Position, in der die den Eingangssignalen entsprechenden unsynthetisierten Signale der Ausgabeeinrichtung zugeleitet werden, und

40

(b) einer zweiten Position, in der das synthetisierte Signal der Ausgabeeinrichtung zugeleitet wird.

6. Vorrichtung nach Anspruch 5, wobei das synthetisierte Signal ein Signal ist, welches im wesentlichen einem Signal aus der aus den Brustkorbleitungssignalen V3R, V4R, V5R, V7, V8 und V9 (Fig. 3) bestehenden Gruppe entspricht.

45

7. Vorrichtung nach Anspruch 5, wobei die Eingabeeinrichtung Mittel (20) zum Empfang eines Eingangssignals von einer Masse- bzw. Erdelektrode, die in einer üblichen Position RL (Fig. 1) des Körpers (100) positioniert ist, enthält und wobei

(a) Eingangssignale von den Elektrodenpositionen V1, V2, V4, V5, V6, RA, LA und LL (Fig. 1, 3) als RL bezeichnet sind und

50

(b) Ausgangssignale als RA bezeichnet sind.

8. Verfahren zur Erfassung der Herzaktivität eines menschlichen Körpers (100), wobei Brustkorbelektroden in Brustkorbpositionen V1, V2, V3, V4, V5 und V6 (Figuren 1, 3) des Körpers angebracht sind und Extremitätenelektroden in Positionen RA, LA und LL (Fig. 1) des Körpers angebracht sind und wobei durch die Elektroden im Ansprechen auf die Herzaktivität erzeugte Spannungssignale abgefühlt werden, gekennzeichnet durch den Schritt des Synthetisierens eines Spannungssignals aus den abgeführten Signalen, welches einem Spannungssignal entspricht,

55

das durch eine weitere Brustkorbelektrode erzeugt werden würde, wenn eine solche weitere Brustkorbelektrode am Körper in einer anderen Brustkorbposition als den Brustkorbpositionen verwendet werden würde.

- 5 9. Verfahren nach Anspruch 8, wobei das synthetisierte Signal ein Signal ist, welches im wesentlichen einem Signal entspricht, das durch eine am Körper (100) in einer Position, die aus der aus den Brustkorbpositionen V3R, V4R, V5R, V7, V8 und V9 (Fig. 3) gebildeten Gruppe ausgewählt ist, angeordnete weitere Brustkorbelektrode erzeugt werden würde.
- 10 10. Verfahren nach Anspruch 8, das den Schritt des Anbringens einer Masseelektrode in der Position RL (Fig. 1) des Körpers (100) und des Abführens der Spannungssignale von den Positionen V1, V2, V3, V4, V5, V6, RA, LA und LL (Fig. 1) bezüglich der Masseelektrode einschließt.

#### Revendications

- 15 1. Appareil de traitement de signaux destiné à être utilisé avec un électrocardiographe contrôlant l'activité du cœur humain, ledit appareil comprenant des moyens d'entrée (10,15) pour recevoir des signaux d'entrée provenant d'électrodes fixées au corps d'un sujet (100), dont l'activité cardiaque est contrôlée, lesdites électrodes comprenant des électrodes thoraciques positionnées en des positions classiques V1, V2, V3, V4, V5 et V6 (figures 1, 3) dudit corps et des électrodes appliquées sur les membres et qui sont situées dans des positions classiques RA, LA et LL (figure 1) dudit corps, ledit appareil étant caractérisé par :

(a) des moyens de traitement de signaux (4,5) connectés de façon opérationnelle auxdits moyens d'entrée (10,15) pour synthétiser un ou plusieurs signaux à partir desdits signaux d'entrée lorsque lesdites électrodes sont ainsi positionnées, ledit signal ou lesdits signaux synthétisés correspondant sensiblement à un signal ou à des signaux non synthétisés, qui seraient produits par une autre ou d'autres électrodes thoraciques, si une telle autre électrode ou d'autres telles électrodes thoraciques étaient utilisées sur ledit corps (100) en une ou des positions thoraciques autres que lesdites positions classiques; et

(b) des moyens (75) de délivrance de signaux servant à délivrer ledit signal synthétique en tant que signal de sortie audit électrocardiographe.

2. Appareil selon la revendication 1, dans lequel ledit signal synthétisé est un signal correspondant pour l'essentiel à un signal provenant du groupe constitué par des signaux de conducteurs thoraciques V3R, V4R, V5R, V7, V8 et V9 (figure 3).

3. Appareil selon la revendication 1, dans lequel ledit appareil comprend des moyens (figure 4) pour produire comme signaux de sortie envoyé audit électrocardiographe à partir desdits moyens de sortie (75), des signaux non synthétisés correspondant auxdits signaux d'entrée provenant desdites électrodes situées sur les membres et desdites électrodes thoraciques, positionnées de façon classique, ledit appareil comprenant en outre des moyens (SW) de sélection de signaux servant à réaliser un guidage sélectif vers lesdits moyens de sortie (75) :

(a) lesdits signaux correspondant auxdits signaux d'entrée; ou

(b) audit signal synthétisé.

4. Dispositif selon la revendication 3, dans lequel ledit signal synthétisé est un signal correspondant sensiblement à un signal provenant du groupe comprenant des signaux de conducteurs thoraciques V3R, V4R, V5R, V7, V8 et V9 (figure 3).

5. Appareil selon la revendication 3, dans lequel lesdits moyens de sélection de signaux comprennent un commutateur (SW) pouvant être commuté entre :

(a) une première position, dans laquelle lesdits signaux non synthétisés correspondant auxdits signaux d'entrée sont dirigés vers lesdits moyens de sortie; et

(b) une seconde position, dans laquelle ledit signal synthétisé est dirigé vers lesdits moyens de sortie.

6. Appareil selon la revendication 5, dans lequel ledit signal synthétisé est un signal correspondant sensiblement à un signal provenant du groupe comprenant des signaux de conducteurs thoraciques V3R, V4R, V5R, V7, V8 et V9 (figure 3).

5 7. Appareil selon la revendication 3, dans lequel lesdits moyens d'entrée comprennent des moyens (20) pour recevoir un signal d'entrée provenant d'une électrode de masse positionnée dans une position classique RL (figure 1) dudit corps (100), et dans lequel :

10 (a) des signaux d'entrée provenant desdites électrodes dans des positions V1, V2, V3, V4, V5, V6, RA, LA et LL (figures 1, 3) sont désignés par RL; et

(b) des signaux de sortie sont désignés par RA.

15 8. Procédé pour contrôler l'activité cardiaque d'un corps humain (100), dans lequel des électrodes thoraciques sont fixées dans des positions thoraciques V1, V2, V3, V4, V5 et V6 (figures 1, 3) dudit corps et des électrodes pour les membres sont fixées dans les positions RA, LA, LL (figure 1) dudit corps, et selon lequel les signaux de tension produits par lesdites électrodes en réponse à ladite activité cardiaque sont détectés, caractérisé par l'étape consistant à synthétiser, à partir desdits signaux détectés, un signal de tension correspondant essentiellement à un signal de tension qui est produit par une autre électrode thoracique, si une telle autre électrode thoracique a été  
20 utilisée sur ledit corps dans une position thoracique autre que lesdites positions thoraciques.

9. Procédé selon la revendication 8, selon lequel ledit signal synthétisé est un signal correspondant sensiblement au signal qui serait produit par une autre électrode thoracique située sur ledit corps (100) dans une position choisie dans le groupe comprenant des positions thoraciques V3R, V4R, V5R, V7, V8 et V9 (figure 3).

25 10. Procédé selon la revendication 8, comprenant l'étape de fixation d'une électrode de masse dans la position RL (figure 1) dudit corps (100) et de détection desdits signaux de tension à partir desdites positions V1, V2, V3, V4, V5, V6, RA, LA et LL (figure 1) en rapport avec ladite électrode de masse.

30

35

40

45

50

55

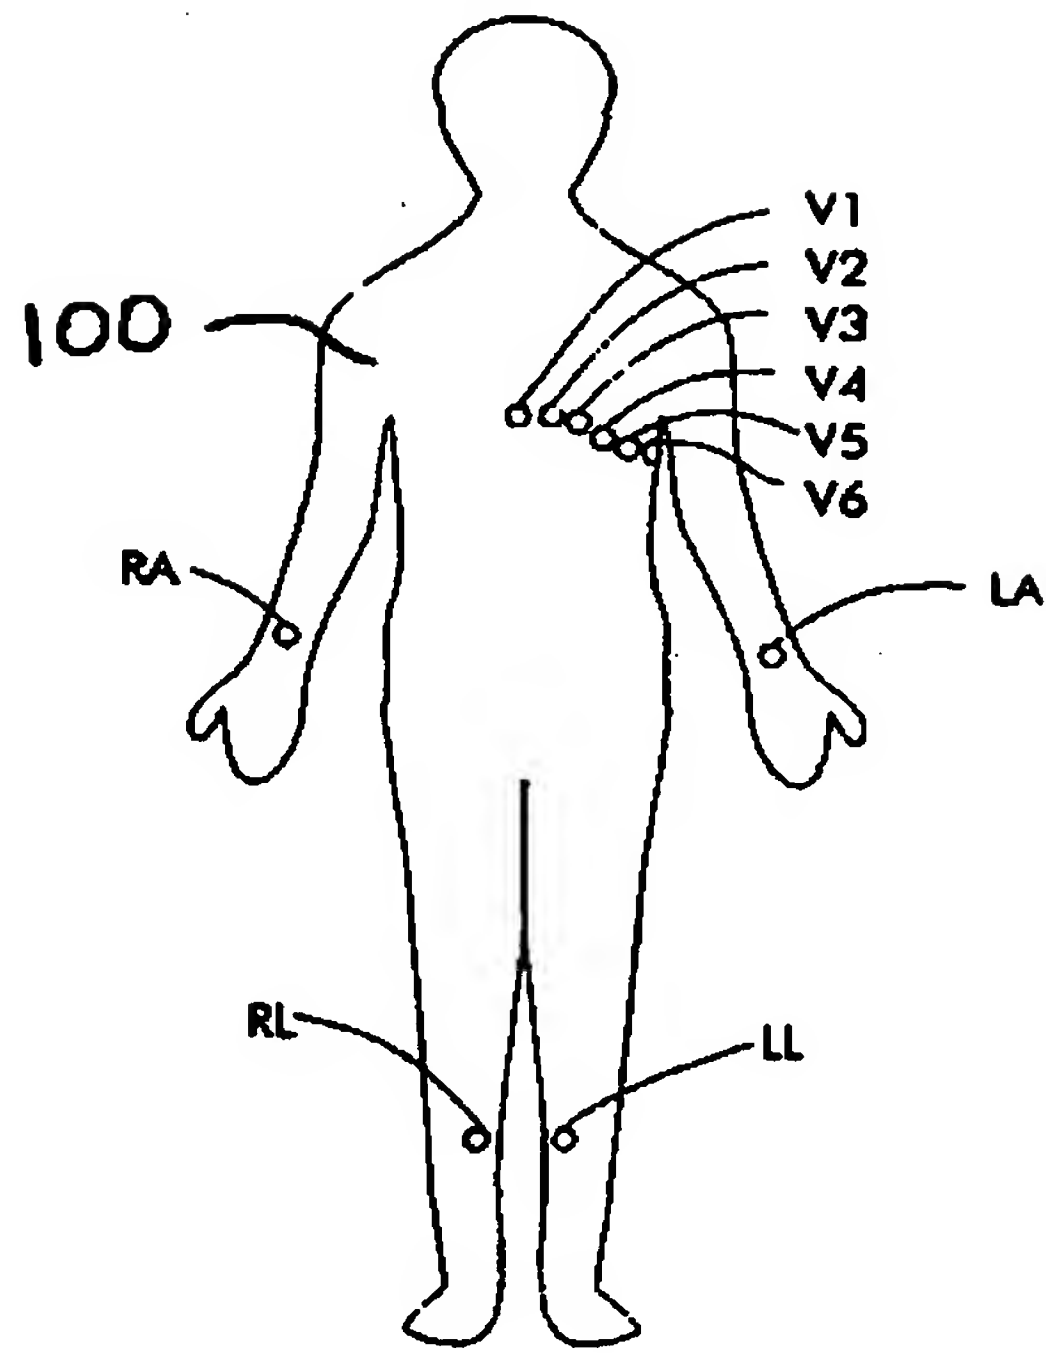


Fig. 1

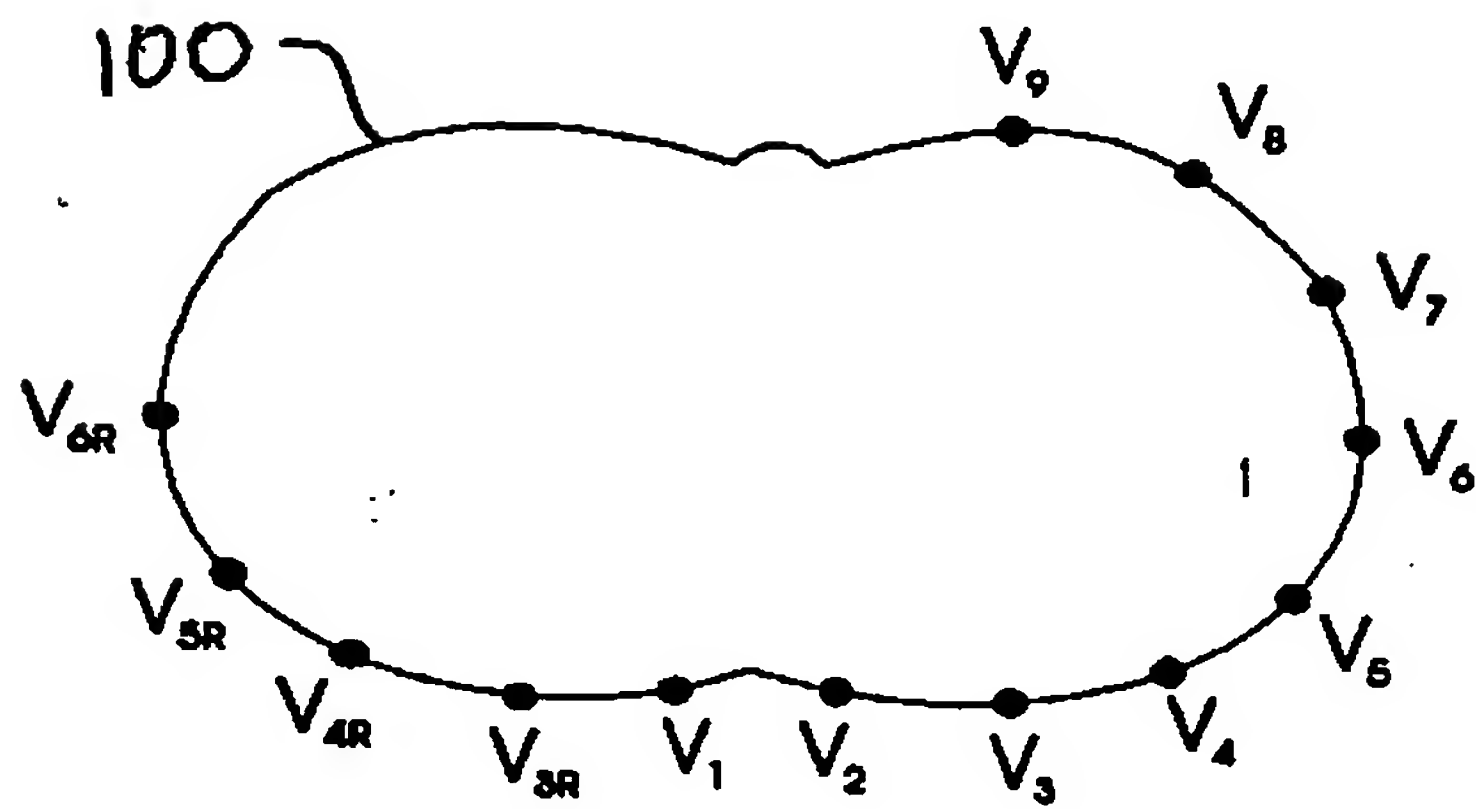


Fig.3

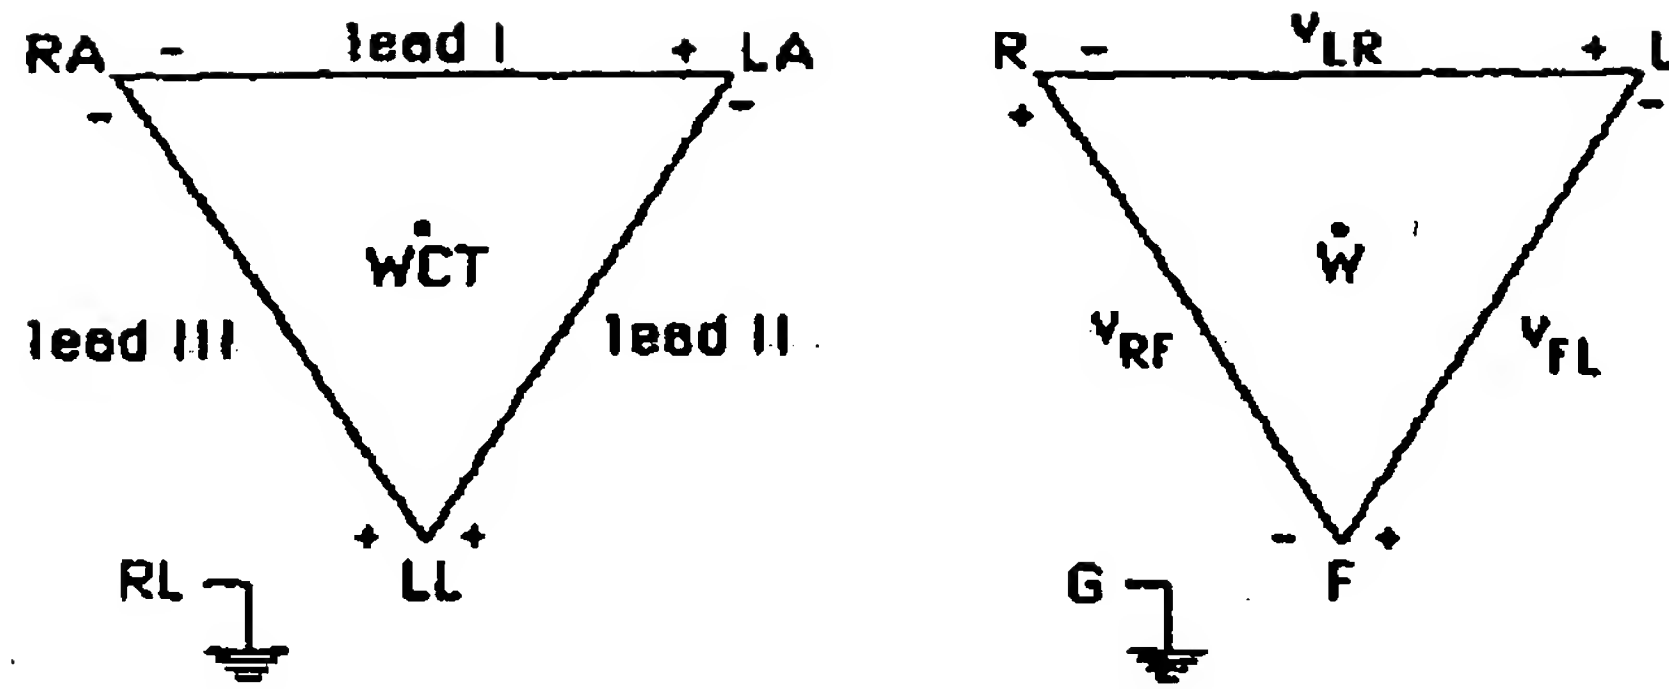


Fig. 2

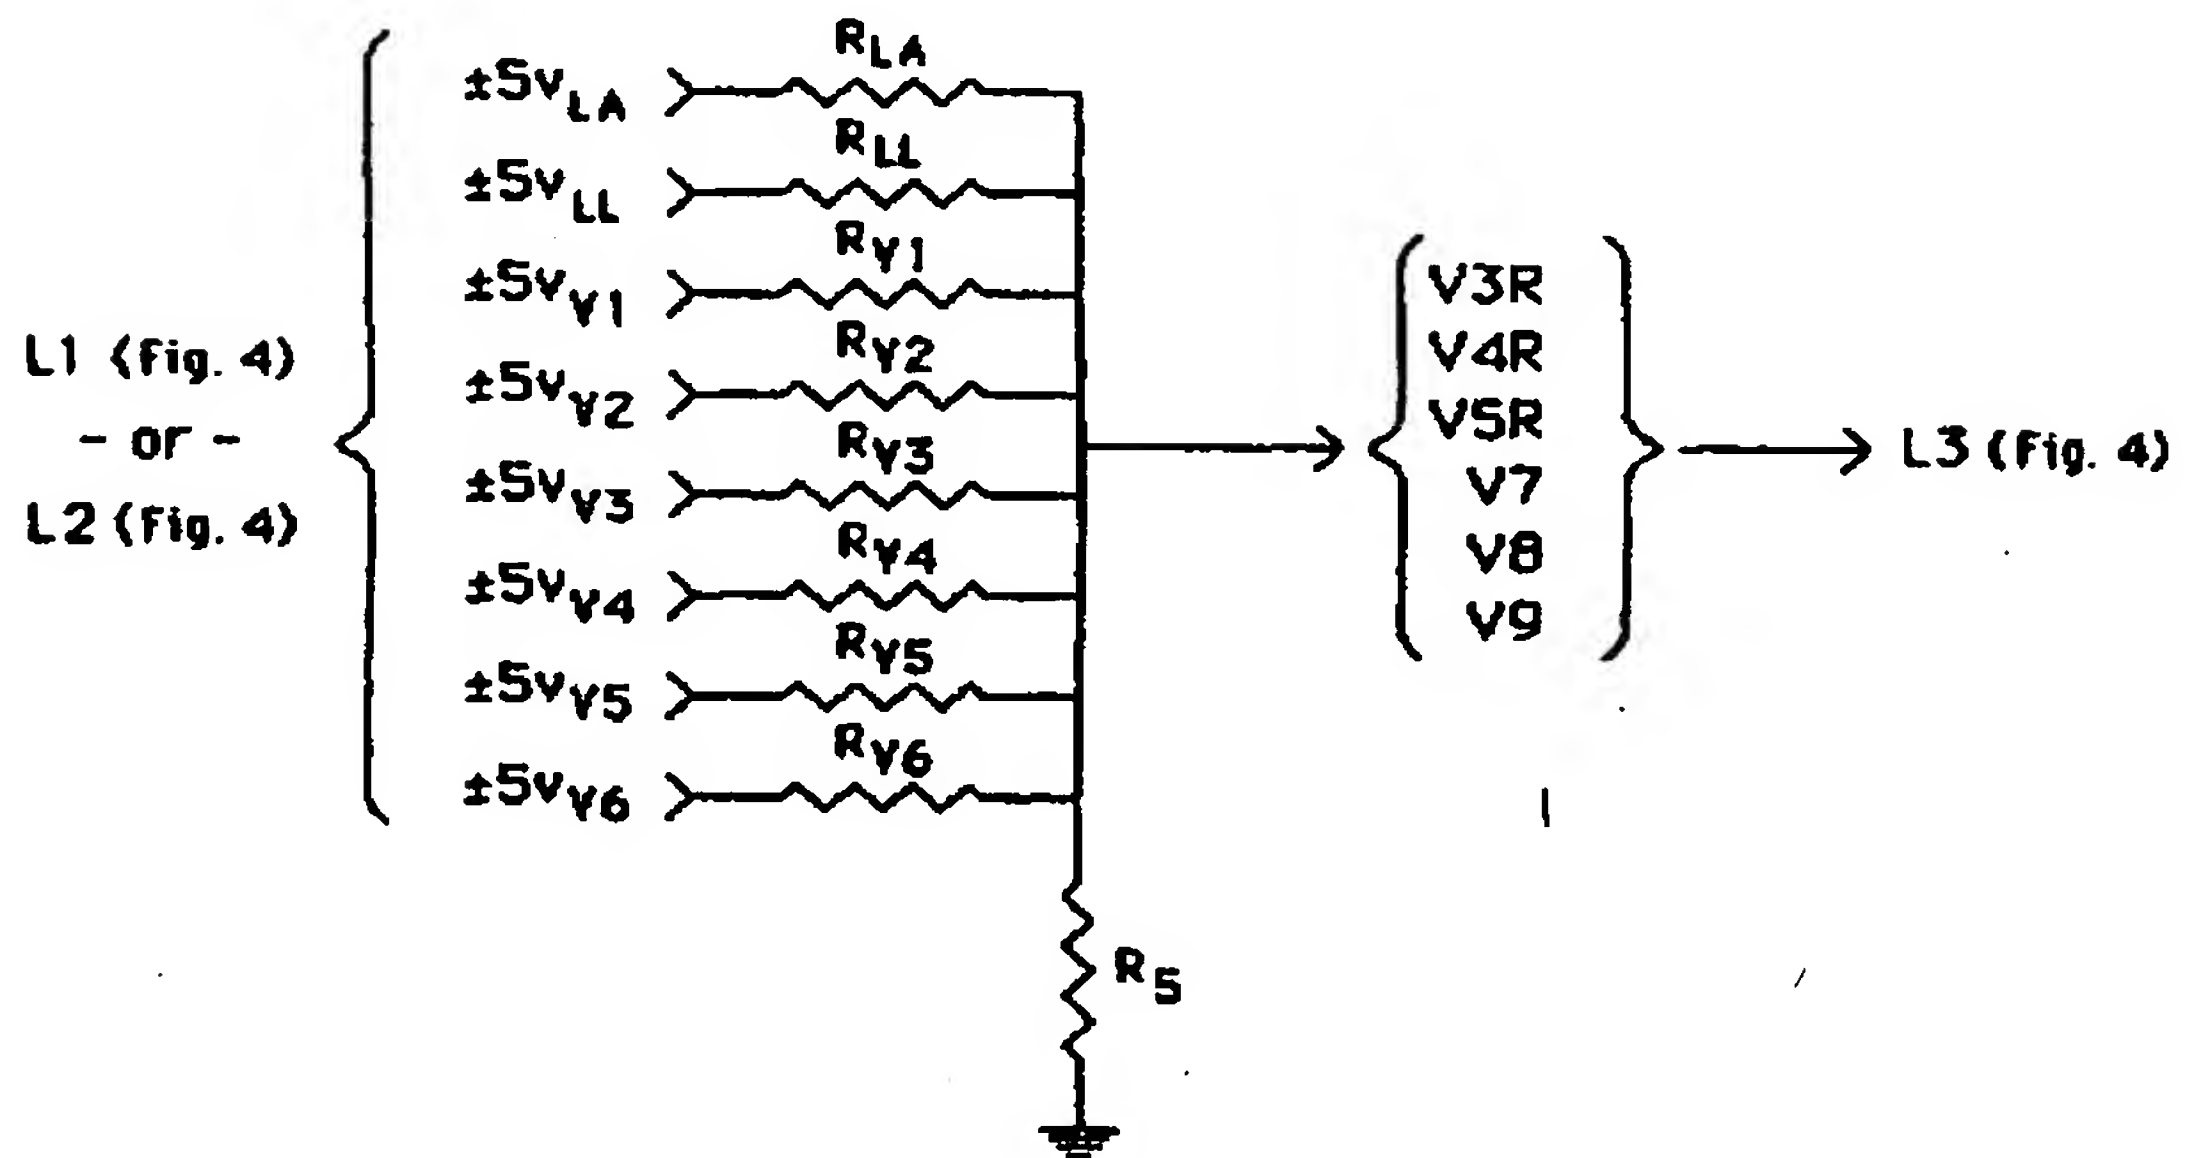
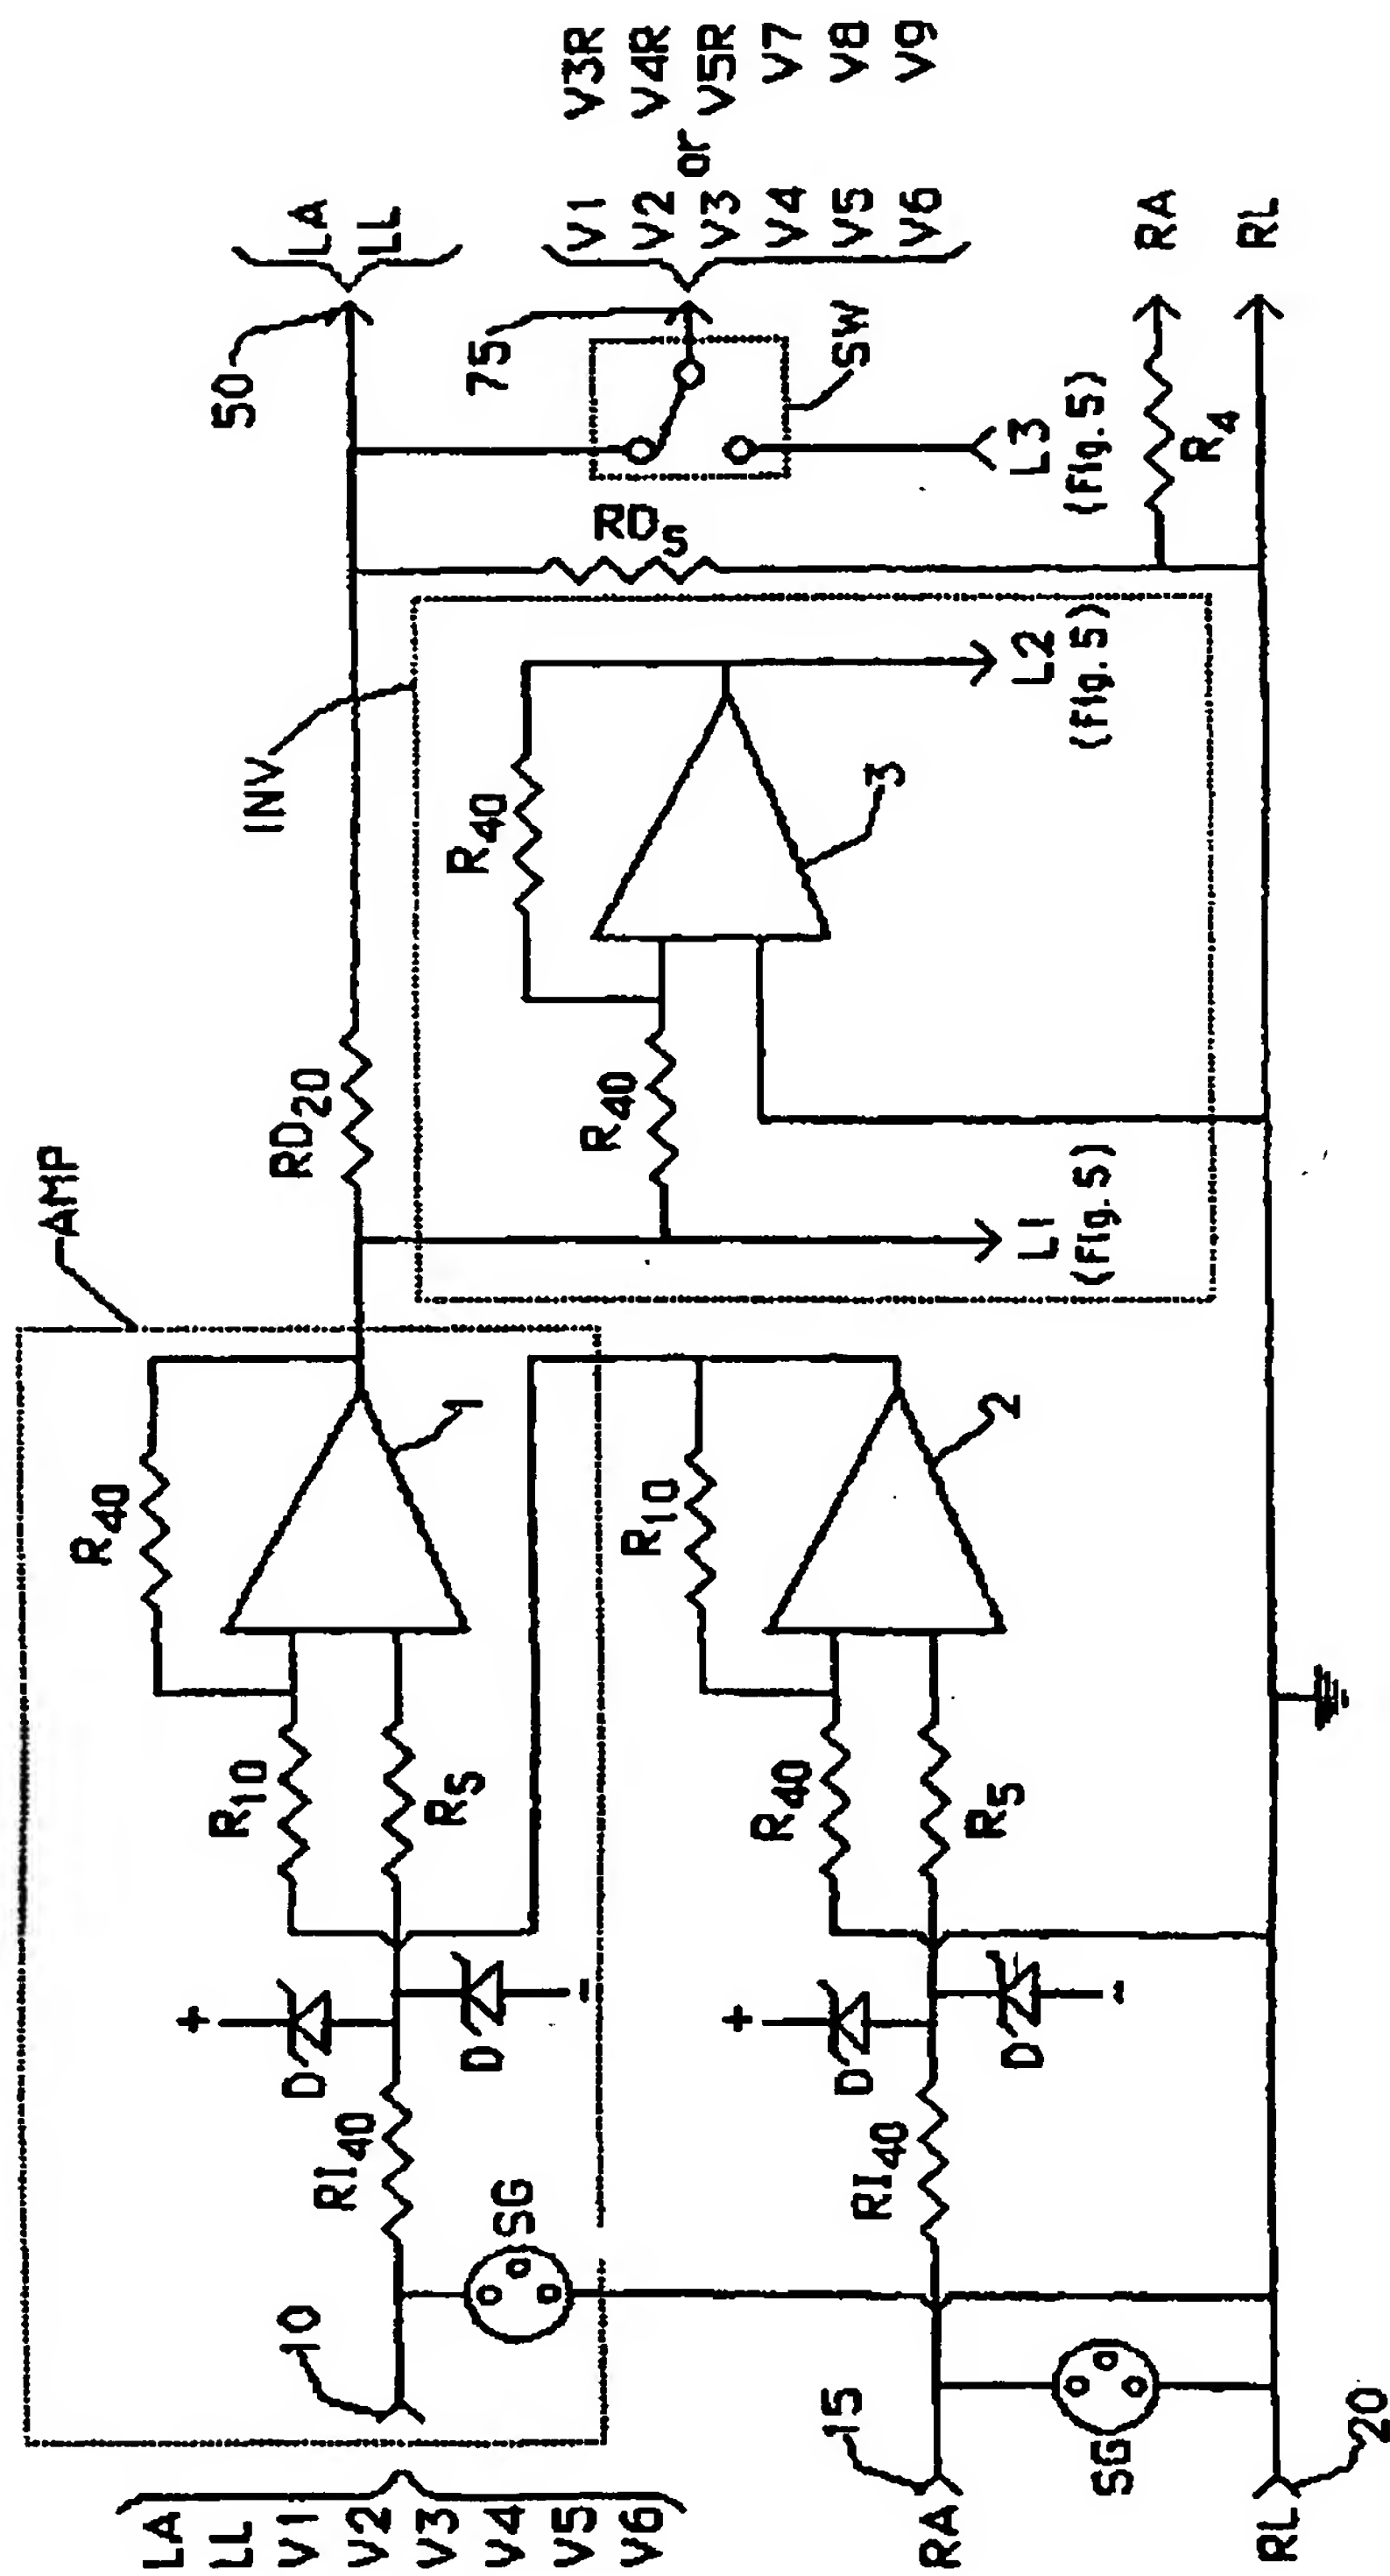


Fig. 5



**Fig. 4**